

BGH DieCast One

similar to 1.2367 acc. to DIN EN ISO 4957

Typical Composition Mass-%

C	Si	Mn	P	S	Cr	Mo	V
0,37	0,35	0,30	≤ 0,015	≤ 0,003	5,10	2,25	0,55

Properties

BGH DieCast One is a Cr-Mo-V-alloyed hot working steel with optimized chemistry compared to DIN-grade 1.2367. By using ESR (electro slag remelting) excellent homogeneity and cleanliness are achieved.


BGH DieCast One is the perfect choice for aluminium die casting tools. It meets the highest demands on strength and wear resistance at high temperatures and provides outstanding dimensional and shape stability and good resistance against tempering.

Delivery Condition

- ✂ annealed (+A) max. 229 HBW
- ✂ EFS-annealed (extra fine structure)

Heat Treatment Guideline Values

	Temperature [°C]	Cooling medium
Annealing (+A)	720 - 880	Air (furnace)
Quenching and tempering (+QT)	1010 - 1050 (Hardening) Tempering: see below	Oil, polymer, air, saltbath Air
Stress relieving (+SR)	Approx. 40 °C below tempering temperature	Air (furnace)

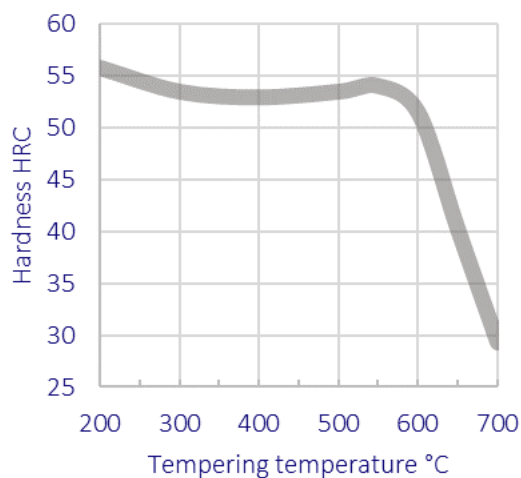

Tempering graph, hardening: 1020 °C/30 min/oil

Recommendations for tempering:

- 1st tempering to target hardness acc. tempering diagram
- 2nd tempering appr. 30 °C below 1st tempering temperature
- 3rd tempering appr. 30 °C below 2nd tempering temperature

The information contained in this data sheet is unbinding and serves as a first orientation. Liability is excluded, errors and printing mistakes are reserved.

Quality

- ISO 9001
- ISO 14001
- ISO 50001
- Approvals acc. to standards like ABS, BV, DNV ...
- Customer specific approval certificates

Innovation

- Fully automated ultrasonic testing up to dia. 1000 mm
- CO₂-reduction by innovative heat treatment solutions

Flexibility

- Product range from fine wire to forging
- Directly from stock close at hand

Individuality

- Dimensions
- Tolerances
- Surface qualities
- Delivery conditions

Your personal contact:

BGH Edelstahlwerke GmbH

Am Stahlwerk 1
01705 Freital
+49 351 646-0
www.bgh.de

