

1.2316 (X38CrMo16)

acc. to DIN EN ISO 4957

Excellence in Specialty Steel

Typical Composition Mass-%

C	Si	Mn	Cr	Mo	Ni
0,34	0,25	0,70	15,70	0,82	0,50

Properties

1.2316 is a highly alloyed martensitic mould steel with good toughness in combination with good machinability and polishability.

The usage of chromium as an alloying element provides improved corrosion resistance.

Delivery Condition

- ✘ quenched and tempered, (+QT), max. 300 HBW

Application Area


Highly stressed tools and moulds for processing of corrosive polymers and plastics.

Typical Applications

- ✘ Plastic moulds
- ✘ Blow moulds
- ✘ Extrusion tools, screws, barrels
- ✘ Components for food industry

Heat Treatment Guideline Values

		Temperature [°C]	Cooling medium
Quenching and tempering (+QT)	Hardening	1020 - 1050	Oil, polymer
	Tempering	See below	Air

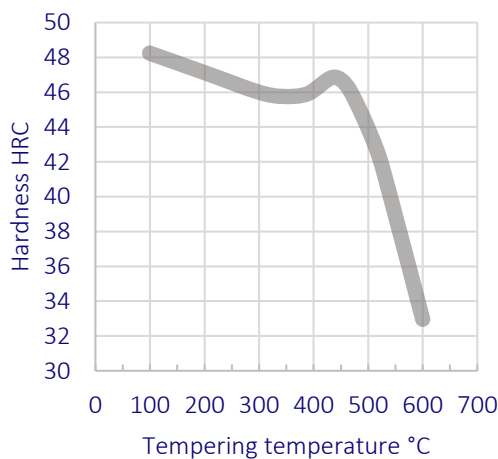

Tempering graph: quenched and tempered condition

Quality

- ISO 9001
- ISO 14001
- ISO 50001
- Approvals acc. to standards like ABS, BV, DNV ...
- Customer specific approval certificates

Innovation

- Fully automated ultrasonic testing up to dia. 1000 mm
- CO₂-reduction by innovative heat treatment solutions

Flexibility

- Product range from fine wire to forging
- Directly from stock close at hand

Individuality

- Dimensions
- Tolerances
- Surface qualities
- Delivery conditions

Your personal contact:

BGH Edelstahlwerke GmbH

Am Stahlwerk 1
01705 Freital
+49 351 646-0
www.bgh.de

